

# TEMPORIZZATORE UNDECAL 24V AC TOP 48 C1



0.1 s • 60 h

C1

88 886 005

88 886 006

560 Ω-2 W / 24 V ~ ≡

Multi-function

A, B, C, H, At, Ht

2 timed changeover

5 A ~ 1 A V ≡

TEMPORIZZATORE:

Marca CROUZET




TIPO UNDECAL (11 piedini)

Terminal identification	C1
2 - 10 Supply	●
Bridge (7 - 10) for 24 V supply	●
Bridge (10-11) for 24 V supply	—
Control contact (6 - 2)	●
1 - 3 - 4 - Timed relay output	●
11 - 8 - 9 - Timed relay output	●
2 - 7 - Supply	—
1 - 3 - 4 - Instantaneous relay output	—
8 - 5 - 6 - Timed relay output	—

## FUNZIONE TIPO "B"

Premendo un istante il pulsante o il contatto posto tra 2-6 si attivano i contatti:

1-3-4 oppure 8-9-11

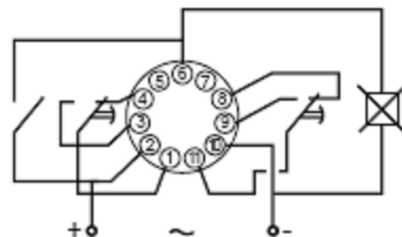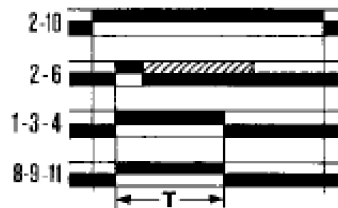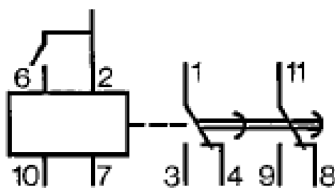

## Function and use

Display of output state by LED	"UP" output in operation	Green LED
	"ON" power on	Red LED
Voltage variation		± 15 % Un 127 V+10% - 240V+10%
		1.5 W / 24 V
TOP 48 C1		5 VA / 110 • 127 V
		10 VA / 220 • 240V